


DALItalkerV (DT5) Interface info:

- DALI I/O communications port
- DMX I/O communications port
- DALI 16Vdc 250ma power supply on board
- 4bit DALI group address switch on board
- 4 contact closure inputs for AV interface or building management system
- 8 preset x 16 channel or 16 preset x 8 channel preset memory configuration
- DMX snapshot mode preset programming
- requires 20-32Vdc power supply at 350ma
- approximately 3"x3" DIN mount package

The DT5 interface allows DALI ballasts and DMX dimmers to work together sharing the same DALI controls. The DALI presets are stored within the DALI ballasts which are configured and programmed by the DALI control stations as usual. The DMX presets are stored within the DT5 interface and are programmed by any DMX device using our DMX snapshot mode firmware. Once the presets are programmed, both the DMX and DALI scenes are recalled together by the same DALI control stations.

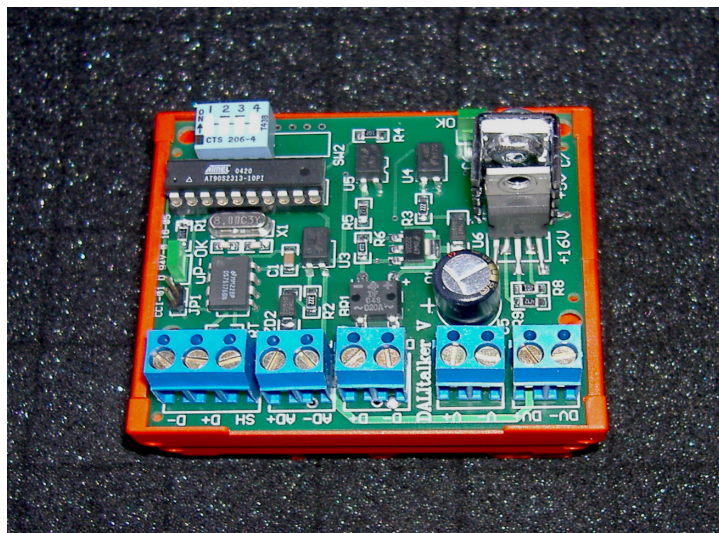

For more information contact:

Bruce McIntyre
Luella Enterprises
toll free (Canada): 1-866-898-1597
ph: 604-898-1597
bruce@luellaenterprises.ca
www.luellaenterprises.ca